




#PRO-Action

- energy-efficient - productivity-enhancing - super-compact

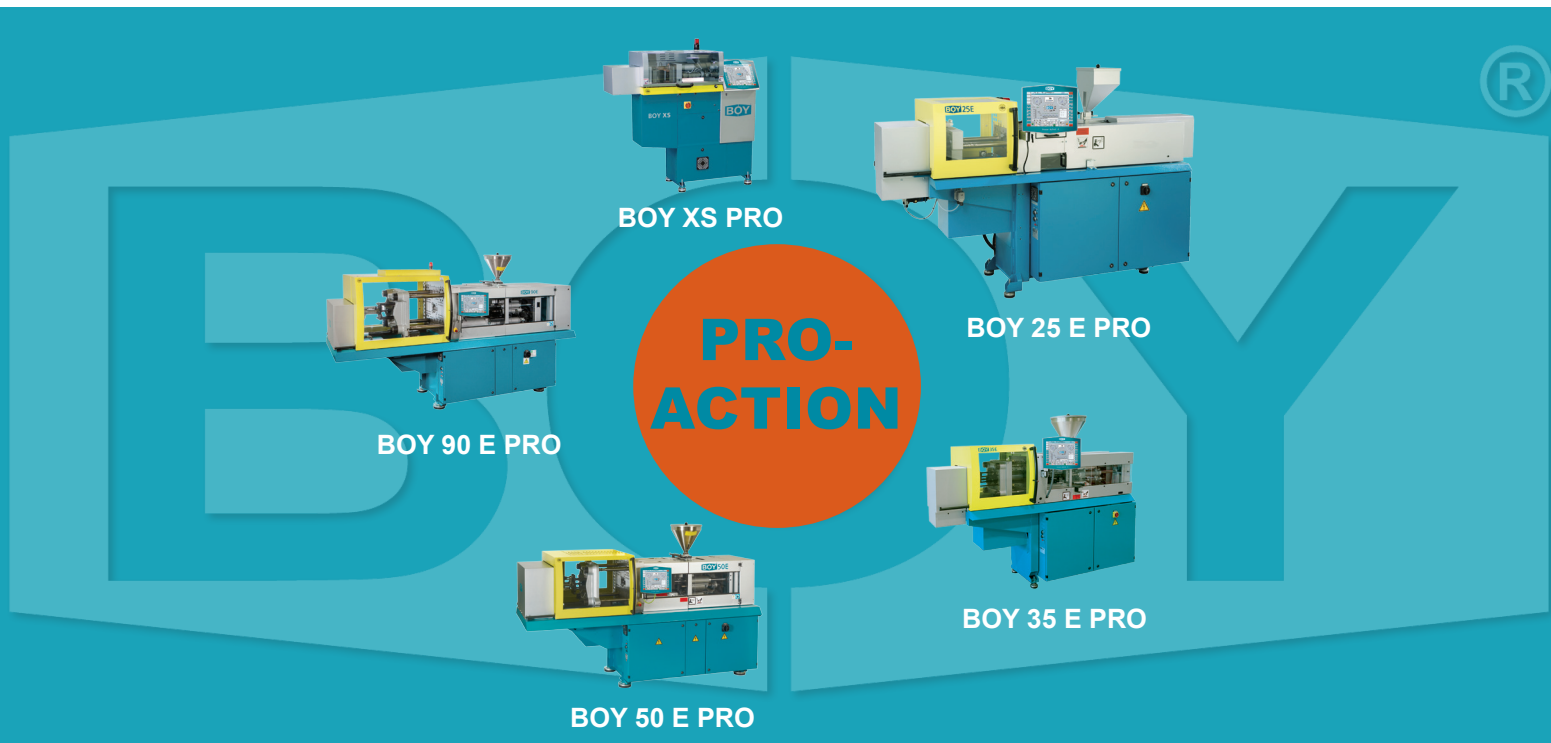

		BOY XS PRO	BOY 25 E PRO	BOY 35 E PRO	BOY 50 E PRO	BOY 90 E PRO
Footprint	m ²	0,78	1,8	1,96	3,25	4,66
Clamping force	kN	100	250	350	500	900
Distance between tie bars	mm	160 (diagonal 205)	254	280 x 254	360 x 335	430 x 360
Injection unit		SP14	SP69	SP96	SP170	SP400
Screw diameter	mm	14	22	28	32	42
Optional screw diameters	mm	8, 12, 16, 18	12, 14, 18, 24, 28, 32	14, 18, 22, 24, 32	28, 38, 42	36, 48, 52
Energy consumption EM 60.1 with options	class / kWh/kg	7+ / ≤ 0,49	7+ / ≤ 0,49	7+ / ≤ 0,49	9+ / ≤ 0,31	9+ / ≤ 0,31

- All machines with Procan ALPHA 4 and conventional water distributor
- Electric waterflow system available for BOY 25 E PRO - BOY 90 E PRO, not BOY XS PRO
- BOY XS PRO / BOY 25 E PRO with hopper in standard
- BOY 35 E PRO / BOY 50 E PRO / BOY 90 E PRO with quick-emptying device in standard, without hopper